



Skates: Steerable Skates (ST Series)

▲ They incorporate a 1 meter drawbar and a platform that swivels on a thrust bearing allowing movement around bends.



ST30



ST60



ST120

Model		ST30	ST60	ST120
Capacity	kg(lb.)	3000(6600)	6000(13200)	12000(26400)
Type of Roller		nylon	nylon	steel
No. of Roller	(pcs)	4	8	8
Roller Size	ΦxW (mm)(in.)	Φ85x90(3x3.5)	Φ85x90(3x3.5)	Φ83x85(3x3.3)
Dimensions	LxWxH (mm)(in.)	310x255x105(12.2x10x4.1)	630x400x115(24.8x15.7x4.5)	630x440x115(24.8x15.7x4.5)
Net Weight	kg(lb.)	15(33)	50(110)	66(145)

Skates: Complete Skate Kits

Including 4 roller skates, 2 turntables, 2 packing plates, 2 steering handles, 2 link-up bars, one draw bar, one metal box.




- ▲ For short, variable transportation distances.
- ▲ For installation works and movement of heavy loads.
- ▲ The steering handle gives you precise control making it easy to maneuver large machinery or into tight areas.
- ▲ Moving speed not exceed 5m/min.
- ▲ Minimum turning radius is 3m.

IMPORTANT!

- ▲ All maximum carrying capacities are based for use on a steel surface, Which withstands the pressure of the chain-roller. For safety, the carrying capacities in complete sets are calculated so that 2 Roller Skates could support the full load on uneven surfaces.
- ▲ The track surface is important for the safe transportation of the load, not the carrying capacity of the Roller Skate. Tiles are unsuitable. Movement on tarmac and concrete is restricted. In these cases it is recommended to put a steel plate of a minimum of 10mm thickness underneath.
- ▲ Due to the little effort required to overcome the rolling resistance(4-7% of the total load) precautionary measures must be taken for use on inclined surfaces.

Model		SK20	SK30	SK60
Capacity	kg(lb.)	20000(44000)	30000(66000)	60000(132000)
Length Support	(mm)(in.)	120(4.7)	120(4.7)	130(5.1)
Width Support	(mm)(in.)	120(4.7)	120(4.7)	130(5.1)
Total Height	(mm)(in.)	108(4.3)	117(4.6)	140(5.5)
Rollers Dia.	(mm)(in.)	Φ18(0.7)	Φ24(1)	Φ30(1.2)
Swivel Top	(mm)(in.)	Φ130(5.1)	Φ130(5.1)	Φ150(6)
Weight of Set	kg(lb.)	50(110)	58(128)	92(202)

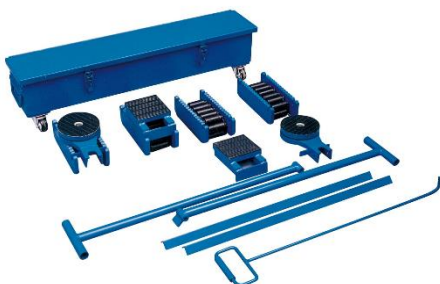

SK30